



# e



**PRODUCT  
INFO.  
2024**

## CATALOGUE





## **COB** **SPOT LIGHT**

MODEL: **C-1**

POWER: **5W**

COLOUR: 6500K, 4000K, 3000K (RED, GREEN, BLUE)

CUT HOLE SIZE: 1.5", 2.5"


DIAMETER: Ø (75mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

MATERIAL: ALUMINUM

CRI: RA > 80

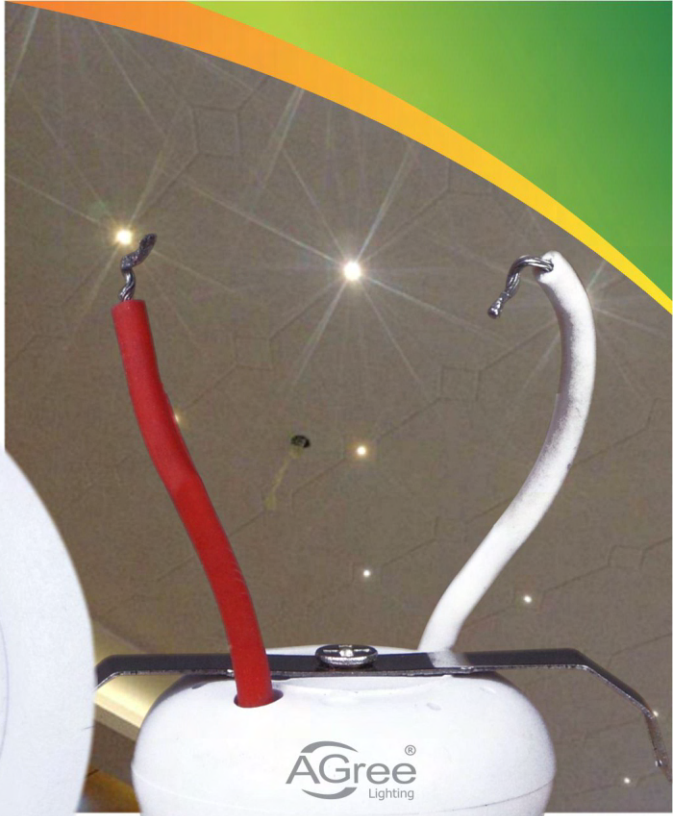

## **COB** **SPOT LIGHT**

MODEL: C-2

POWER: 1W

COLOR: 6500K, 4000K, 3000K

CUT HOLE SIZE: 1"

VOLTAGE: AC~165V-265V

BODY MATERIAL: POLY CARBONATE

CRI: Ra > 80



## **COB** **SPOT LIGHT**

MODEL: C-2

POWER: 3W

COLOR: 6500K, 4000K, 3000K

CUT HOLE SIZE: 1.5"

VOLTAGE: AC~165V-265V

BODY MATERIAL: POLY CARBONATE

CRI: Ra > 80



**3W**

## **COB SPOT LIGHT**

MODEL: **C-2**

POWER: **3W**

COLOUR: 6500K, 4000K, 3000K

CUT HOLE SIZE: 3W ( 2")

DIAMETER: Ø(75mm)

VOLTAGE: AC~165V-265V

LUMENS: 90-100 Lm/W

MATERIAL: POLY CARBONATE

CRI: RA>80



## **SMD** **DOWN LIGHT**

POWER: **3W**

COLOUR: 6500K, 4000K, 3000K

CUT HOLE SIZE: (2")

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

MATERIAL: POLY CARBONATE

CRI: RA>80



agree pe sab agree

18W

12W

7W



ENERGY  
SAVING

30W

## COB DOWN LIGHT

MODEL: C-22

POWER: 7W, 12W, 18W, 30W

COLOUR: 6500K, 4000K, 3000K

CUT HOLE SIZE: 7W (3")      DIAMETER: Ø (105mm)

12W (4")                      Ø (130mm)

18W (6")                      Ø (180mm)

30W (8")                      Ø (235mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

MATERIAL: ALUMINUM + PC

CRI: RA>80

**MOVEABLE**



agree pe sab agree



**7W**  
**3"**

**12W**  
**4"**



## **COB** **DOWN LIGHT**

MODEL: **C-25**

POWER: **7W, 12W**

COLOUR: 6500K, 4000K, 3000K

CUT HOLE SIZE: 7W (3")    DIAMETER: Ø (110mm)

12W (4")    DIAMETER: Ø (115mm)

DRIVER: COB CHIP + DRIVER

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

MATERIAL: ALUMINUM

CRI: RA>80

**New**  
**Arrival**





**8W**  
3"

**12W**  
4"



**SMD**  
**DOWN LIGHT**

MODEL: **PL-24**

POWER: **8W, 12W**

COLOUR: 6500K, 4000K, 3000K

CUT HOLE SIZE: 8W (3")    DIAMETER: Ø (110mm)

12W (4")    DIAMETER: Ø (120mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

MATERIAL: ALUMINUM

CRI: RA > 80



## **SMD** **DOWN LIGHT**

MODEL: **PL-25, PL-26**  
POWER: **8W, 12W (SPECIAL EDITION)**

COLOUR: 6500K, 4000K, 3000K

CUT HOLE SIZE: 8W 3"

12W 4"

DIAMETER: Ø (115 mm)

VOLTAGE: AC~165V-265V

LUMENS: 85-110 Lm/W

MATERIAL: ALUMINUM

CRI: RA<sub>≥</sub>80



## **SMD** **DOWN LIGHT**

MODEL: **PL-27**

POWER: **8W**

COLOUR: 6500K, 4000K, 3000K

CUT HOLE SIZE: (3")

DIAMETER: Ø(85 mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

MATERIAL: ALUMINUM

CRI: RA>80



agree pe sab agree



8W  
3"



12W  
3"

**SMD  
DOWN LIGHT**

MODEL: **PL-30**

POWER: **8W, 12W**

COLOUR: 6500K, 3000K

CUT HOLE SIZE: 8W (3")

12W (3")

DIAMETER: Ø (110mm)

DIAMETER: Ø (110mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

MATERIAL: METAL

CRI: RA>80



301

201



## SMD PANEL LIGHT

MODEL: 201, 301 (SUPER)

POWER: 12W

COLOUR: 6500K, 4000K, 3000K

CUT HOLE SIZE: (5")

DIAMETER: Ø (150mm)

VOLTAGE: AC~165V-265V

DRIVER: ISOLATED

LUMENS: 120-125 Lm/W

MATERIAL: Aluminum

CRI: RA>80



## **SMD** **SPOT LIGHT**

MODEL: **S-26**

POWER: **7W**

COLOUR: 6500K, 4000K, 3000K

CUT HOLE SIZE: 3"

DIAMETER: Ø(110mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

MATERIAL: ALUMINUM

CRI: RA>80



## **COB TRACK LIGHT**

**MODEL: TR-01**

**POWER: 20W, 30W**

**COLOUR: 6500K, 4000K, 3000K**

**BODY COLOUR: WHITE, BLACK**

**DRIVER: PF  $\geq$  0.95/0.85**

**VOLTAGE: AC~100V-265V**

**MATERIAL: ALUMINUM**

**LUMENS: 140-150 Lm/W**

**SURGE PROTECTION: 2.5KV**

**CRI: Ra > 80**



## **COB** **TRACK LIGHT**

**MODEL: TR-07**

**POWER: 20W, 30W**

**COLOUR: 6500K, 4000K, 3000K**

**BODY COLOUR: WHITE, BLACK**

**DRIVER: PF  $\geq$  0.95/0.85**

**VOLTAGE: AC~100V-265V**

**MATERIAL: ALUMINUM**

**LUMENS: 140-150 Lm/W**

**SURGE PROTECTION: 2.5KV**

**CRI: Ra > 80**





## **COB TRACK LIGHT**

**MODEL: TR-08**

**POWER: 30W**

**COLOUR: 6500K, 4000K, 3000K**

**BODY COLOUR: WHITE, BLACK**

**DRIVER: PF  $\geq$  0.95/0.85**

**VOLTAGE: AC~100V-265V**

**MATERIAL: ALUMINUM**

**LUMENS: 140-150 Lm/W**

**SURGE PROTECTION: 2.5KV**

**CRI: Ra  $\geq$  80**



## **COB TRACK LIGHT**

MODEL: TR-09

POWER: 12W, 20W, 30W

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE, BLACK

DRIVER: PF  $\geq$  0.95 / 0.85 / 0.65

VOLTAGE: AC~100V-265V

MATERIAL: ALUMINUM

LUMENS: 140-150 Lm/W

SURGE PROTECTION: 2.5KV

CRI: Ra > 80



## **SMD PANEL**

MODEL: **OPEN PANEL**  
POWER: **6W, 12W, 18W, 24W**  
COLOUR: 6500K, 4000K, 3000K  
VOLTAGE: AC~165V-265V  
LUMENS: 100-110 Lm/W  
MATERIAL: ALUMINUM  
CRI: RA>80





## **SMD** **SLIM PANEL**

MODEL: **PL-01 (SQUARE)**  
POWER: **12W, 18W, 24W**  
COLOUR: 6500K, 4000K, 3000K  
SQUARE SIZE: (6") - (8") - (10")  
DRIVER: PF  $\geq$  0.6  
VOLTAGE: AC~165V-265V  
LUMENS: 90-110 Lm/W  
MATERIAL: ALUMINUM  
CRI: RA>80



## **SMD**

### **SLIM PANEL**

MODEL: **PL-01 (ROUND)**

POWER: **12W, 18W, 24W**

COLOUR: 6500K, 4000K, 3000K

ROUND SIZE: (6") - (8") - (10")

DRIVER: PF  $\geq$  0.6

VOLTAGE: AC~165V-265V

LUMENS: 90-110 Lm/W

MATERIAL: ALUMINUM

CRI: RA > 80



**LED  
BULB**

MODEL: **BULB**  
POWER: **12W, 18W, 30W, 40W**  
COLOUR: 6500K, 3000K  
VOLTAGE: AC~165V-265V  
LUMENS: 100-110 Lm/W  
LAMP BASE: E27 - B22  
CRI: RA>80



## **SMD** **TUBE LIGHT**

MODEL: **SUPER MODEL**

POWER: **20W, 40W**

COLOUR: 6500K, 4000K, 3000K

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

TUBE SIZE: ( 2' ) , ( 4' )

CRI: RA>80



## **SMD** **TUBE LIGHT**

MODEL: **SLIM MODEL**

POWER: **20W, 40W, 60W**

COLOUR: 6500K, 4000K, 3000K

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

TUBE SIZE: ( 2' ) , ( 4' )

BODY MATERIAL: ALUMINUM

CRI: RA>80





## **SMD** **STREET LIGHT**


MODEL: **AGR COBRA**  
POWER: **50W, 100W, 150W, 200W**  
COLOUR: 6500K, 3000K  
VOLTAGE: AC~120V-265V  
LUMENS: 140-150 Lm/W  
SURGE PROTECTION: 4KV  
CRI: RA>80



**SMD  
FLOOD LIGHT**

MODEL: **PC-LENS**  
POWER: **50W, 100W, 150W,  
200W, 300W, 400W**

COLOUR: 6500K, 3000K  
DRIVER: PF  $\geq$  0.95  
VOLTAGE: AC~165V-265V  
LUMENS: 100-110 Lm/W  
SURGE PROTECTION: 4KV  
BODY MATERIAL: ALUMINUM  
CRI: RA > 80

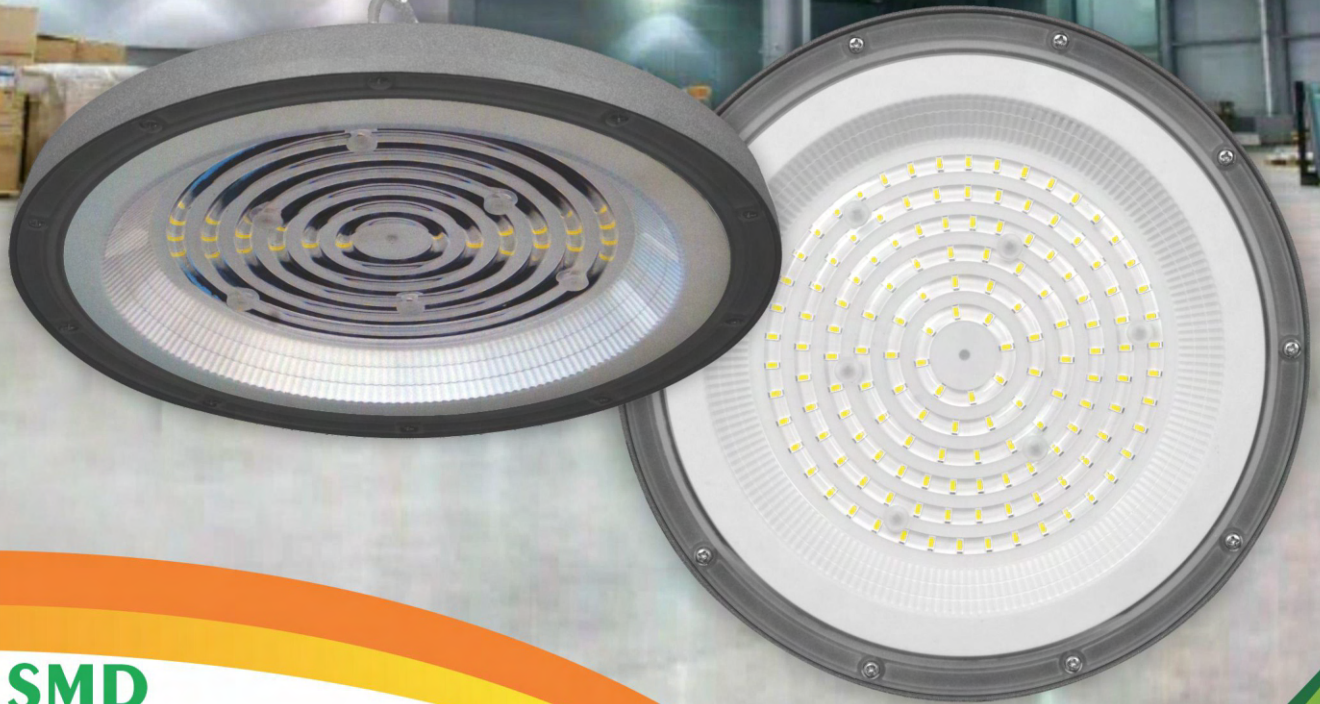

## **SMD** **HIGH BAY**

MODEL: **UFO**

POWER: **100W, 150W, 200W**

COLOUR: 6500K, 3000K

DRIVER: PF  $\geq$  0.95

VOLTAGE: AC~95V-295V

LUMENS: 110-120 Lm/W

SURGE PROTECTION: 4KV

BODY MATERIAL: ALUMINUM

CRI: RA  $\geq$  80      IP66



## **SMD** **PANEL LIGHT**

MODEL: **2X2**

POWER: **48W, 72W**

COLOUR: 6500K, 4000K, 3000K

DIAMETER:  $\varnothing$  (595mm X 595mm) (600mm X 600mm)

VOLTAGE: AC~165V-265V

DRIVER: PF  $\geq$  0.95 / 0.65

LUMENS: 100-110 Lm/W

CRI: RA > 80



## **SMD** **PANEL LIGHT**

MODEL: **1X4**

POWER: **48W**

COLOUR: 6500K, 4000K, 3000K

DIAMETER:  $\varnothing$  295mm X 1195mm

VOLTAGE: AC~165V-265V

DRIVER: PF  $\geq$  0.95 / 0.65

LUMENS: 100-110 Lm/W

SURGE PROTECTION: 2.5KV

CRI: RA > 80



## **SMD** **ICE PANEL**

**MODEL: ICE PANEL (ROUND & SQUARE)**

**POWER: 10W, 18W, 24W, 36W**

**COLOUR: 6500K, 4000K, 3000K**

**CUT HOLE SIZE: 10W (Minimum 50mm) DIAMETER: Ø (100mm )**

**18W (Minimum 50mm) DIAMETER: Ø (120mm)**

**24W (Minimum 50mm) DIAMETER: Ø (170mm)**

**36W (Minimum 50mm) DIAMETER: Ø (220mm)**

**VOLTAGE: AC~165V-265V**

**LUMENS: 100-110 Lm/W**

**MATERIAL: ALUMINUM**

**CRI: RA>80**



## SMD ICE PANEL

MODEL: **SURFACE ICE PANEL (ROUND & SQUARE)**

POWER: **18W, 24W, 36W, 48W**

COLOUR: 6500K, 4000K, 3000K

DIAMETER: Ø 18W (120mm X 120mm)  
Ø 24W (175mm X 175mm)  
Ø 36W (225mm X 225mm)  
Ø 48W (295mm X 295mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

MATERIAL: ALUMINUM

CRI: RA>80





## TRACK

### PATTI

COLOUR: **BLACK & WHITE**

BODY MATERIAL: **PVC & ALUMINUM SPECIAL**





agree pe sab agree



## TRACK

### PATTI


COLOUR: **BLACK & WHITE**

SIZE: 2 METER

BODY MATERIAL: ALUMINUM



**JUNCTION**  
**TRACK JUNCTION**  
COLOUR: **BLACK & WHITE**  
180°, 90°

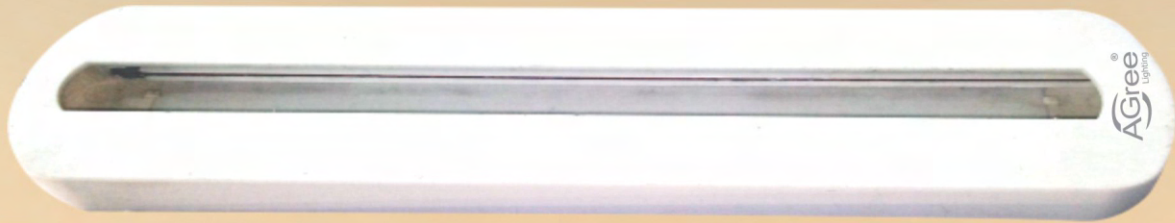

**OPEN  
BASE**

COLOUR: **BLACK & WHITE**

SIZE: **SMALL & LARGE**

# 2024



agree pe sab agree

