



agree pe sab agree

PRODUCT INFO

2025



agreeighting.com 



COB SPOT LIGHT

MODEL: **C-1**

POWER: **5W**

COLOUR: 6500K, 3000K

CUT HOLE SIZE: **1.5" / 2.5"**

DIAMETER: Ø 2.9" (75mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

BODY MATERIAL: ALUMINIUM DIE CAST

CRI: RA_≥80





COB
SPOT LIGHT

MODEL: C-2

POWER: 1W

COLOR: 6500K, 4000K, 3000K

CUT HOLE SIZE: **1"**

DIAMETER: Ø1.5" (38mm)

VOLTAGE: AC~165V-265V

LUMENS: 90-110 Lm/W

BODY MATERIAL: ABS, POLY CARBONATE

CRI: Ra $\geq$ 80





COB **SPOT LIGHT**

MODEL: C-2

POWER: 3W

COLOR: 6500K, 4000K, 3000K

CUT HOLE SIZE: **1.5"**

DIAMETER: Ø1.75" (45mm)

VOLTAGE: AC~165V-265V

LUMENS: 90-110 Lm/W

BODY MATERIAL: ABS, POLY CARBONATE

CRI: Ra $\geq$ 80





3W

COB SPOT LIGHT

MODEL: **C-2**

POWER: **3W**

COLOUR: 6500K, 4000K, 3000K

CUT HOLE SIZE: **2"**

DIAMETER: Ø 2.9" (75mm)

VOLTAGE: AC~165V-265V

LUMENS: 90-110 Lm/W

BODY MATERIAL: ABS, POLY CARBONATE

CRI: RA_≥80





18W

12W

7W

30W

COB DOWN LIGHT

MODEL: C-22

POWER: 7W, 12W, 18W, 30W

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE, BLACK

7W (3") DIAMETER: Ø (105mm)

12W (4") DIAMETER: Ø (130mm)

18W (6") DIAMETER: Ø (180mm)

30W (8") DIAMETER: Ø (235mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

BODY MATERIAL: POLY CARBONATE

HEAT SINK: ALUMINIUM DIE CAST

POWER FACTOR: $\geq 0.95, 0.65$

CRI: RA $\geq$ 80

SURGE PROTECTION: 2.5KV





COB DOWN LIGHT

MODEL: C-25

POWER: 7W, 12W

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE, BLACK

CUT HOLE SIZE: 7W 3"

DIAMETER: Ø (110mm)

12W 3" / 4" DIAMETER: Ø (115mm)

DRIVER: COB CHIP + DRIVER

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

BODY MATERIAL: ALUMINIUM

POWER FACTOR: ≥ 0.65

CRI: RA ≥ 80

SURGE PROTECTION: 2.5KV





SMD DOWN LIGHT

MODEL: **PL-25 (SPECIAL EDITION)**

MODEL: **PL-26**

POWER: **8W, 12W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE, BLACK

CUT HOLE SIZE: **8W 3" / 3.5"** DIAMETER: Ø (110 mm)

12W 3" / 4" DIAMETER: Ø (115 mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

BODY MATERIAL: ALUMINIUM

CRI: RA≥80





SMD **DOWN LIGHT**

MODEL: **PL-30**

POWER: **8W**

COLOUR: 6500K, 3000K, 4000K

BODY COLOUR: WHITE, BLACK

CUT HOLE SIZE: **3"**

DIAMETER: Ø (110mm)

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

BODY MATERIAL: ALUMINIUM

CRI: RA $\geq$ 80





COB TRACK LIGHT

MODEL: **TR-01**

POWER: **20W, 30W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE, BLACK

BEAM ANGLE: 30°

POWER FACTOR: $\geq 0.95, 0.85$

VOLTAGE: AC~100V-265V

BODY MATERIAL: ALUMINIUM DIE CAST

LUMENS: 140-150 Lm/W

SURGE PROTECTION: 2.5KV

CRI: $R_a \geq 80$





COB TRACK LIGHT

MODEL: TR-07

POWER: **20W, 30W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE, BLACK

BEAM ANGLE: 25°

POWER FACTOR: $\geq 0.95, 0.85$

VOLTAGE: AC~100V-265V

BODY MATERIAL: ALUMINIUM DIE CAST

LUMENS: 140-150 Lm/W

SURGE PROTECTION: 2.5KV

CRI: Ra ≥ 80





12W

COB TRACK LIGHT

MODEL: **TR-09**

POWER: **12W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE, BLACK

BEAM ANGLE: 30°

POWER FACTOR: ≥ 0.65

VOLTAGE: AC~100V-265V

BODY MATERIAL: ALUMINIUM DIE CAST

LUMENS: 140-150 Lm/W

SURGE PROTECTION: 2.5KV

CRI: $R_a \geq 80$





COB TRACK LIGHT

MODEL: TR-09

POWER: **20W, 30W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE, BLACK

BEAM ANGLE: 30°

POWER FACTOR: $\geq 0.95, 0.85$

VOLTAGE: AC~100V-265V

BODY MATERIAL: ALUMINIUM DIE CAST

LUMENS: 140-150 Lm/W

SURGE PROTECTION: 2.5KV

CRI: Ra ≥ 80





COB TRACK LIGHT

MODEL: TR-10

POWER: **20W, 30W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE, BLACK

BEAM ANGLE: 25°

POWER FACTOR: $\geq 0.95, 0.85$

VOLTAGE: AC~100V-265V

BODY MATERIAL: ALUMINIUM DIE CAST

LUMENS: 140-150 Lm/W

SURGE PROTECTION: 2.5KV

CRI: Ra ≥ 80



**NEW
ARRIVAL**

SMD SURFACE PANEL LIGHT

MODEL: **OPEN PANEL**

POWER: **12W, 18W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE

POWER FACTOR: ≥ 0.95

VOLTAGE: AC~165V-265V

LUMENS: 120-130 Lm/W

BODY MATERIAL: POLY CARBONATE

CRI: RA $\geq$ 80

SURGE PROTECTION: 2.5KV





SMD

PREMIUM PANEL

MODEL: **PREMIUM (ROUND)**

POWER: **12W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE

POWER FACTOR: ≥ 0.95

CUT HOLE SIZE: **150mm (6")**

DIAMETER: $\varnothing$ **170mm (6.7")**

VOLTAGE: AC~165V-265V

LUMENS: 120-130 Lm/W

BODY MATERIAL: POLY CARBONATE

CRI: RA ≥ 80





SMD

PREMIUM PANEL

MODEL: **PREMIUM (ROUND)**

POWER: **18W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE

POWER FACTOR: ≥ 0.95

CUT HOLE SIZE: **205mm (8")**

DIAMETER: $\varnothing$ **220mm (8.7")**

VOLTAGE: AC~165V-265V

LUMENS: 120-130 Lm/W

BODY MATERIAL: POLY CARBONATE

CRI: RA $\geq$ 80





SMD **BATTEN LIGHT**

MODEL: **SUPER MODEL**

POWER: **20W, 40W**

COLOUR: 6500K, 4000K, 3000K

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

TUBE SIZE: **(2') , (4')**

BODY MATERIAL: METAL

CRI: RA $\geq$ 80



SMD **BATTEN LIGHT**

MODEL: **SLIM MODEL**

POWER: **60W**

COLOUR: 6500K, 4000K, 3000K


VOLTAGE: AC~165V-265V


LUMENS: 100-110 Lm/W

TUBE SIZE: (4')

BODY MATERIAL: ALUMINIUM

CRI: RA $\geq$ 80

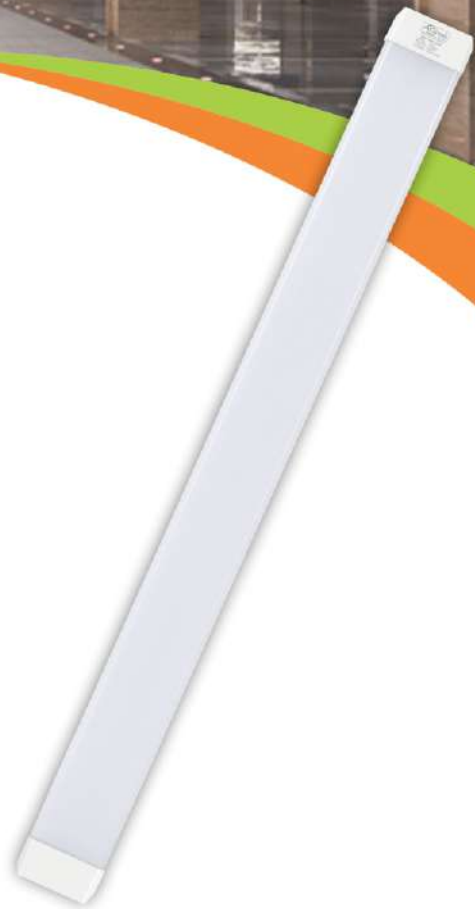

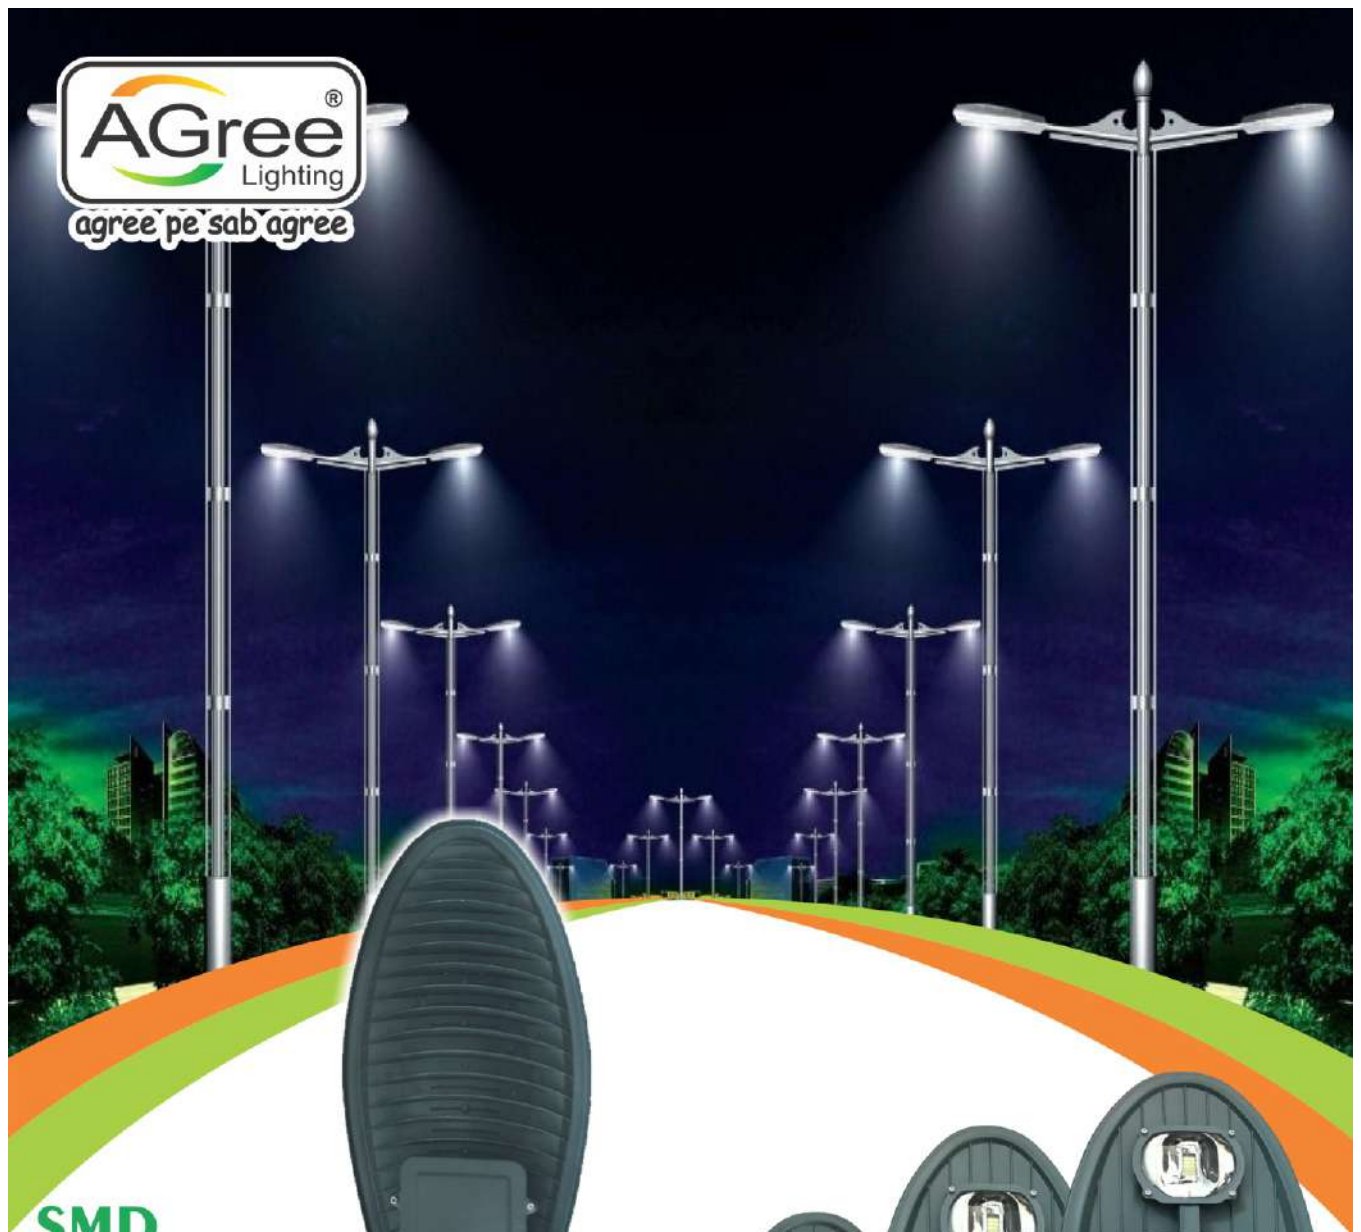

SMD STREET LIGHT

MODEL: **COBRA**

POWER: **50W, 100W,
150W, 200W**

COLOUR: 6500K, 3000K

BODY COLOUR: GREY

BODY MATERIAL: ALUMINIUM DIE CAST

POWER FACTOR: ≥ 0.95

VOLTAGE: AC~165V-265V

LUMENS: 120-130 Lm/W

SURGE PROTECTION: 10KV

CRI: RA $\geq$ 80

IP LEVEL: IP66





SMD **STREET LIGHT**

MODEL: **PREMIUM**

POWER: **50W, 100W, 150W, 200W**

COLOUR: 6500K, 3000K

BODY COLOUR: GREY

BODY MATERIAL: ALUMINIUM DIE CAST

POWER FACTOR: ≥ 0.95

VOLTAGE: AC~165V-265V

LUMENS: 120-130 Lm/W

SURGE PROTECTION: 10KV

CRI: RA $\geq$ 80

IP LEVEL : IP66





SMD **STREET LIGHT**

MODEL: **PREMIUM**

POWER: **60W, 120W, 180W, 240W**

COLOUR: 6500K, 3000K

BODY COLOUR: GREY

BODY MATERIAL: ALUMINIUM DIE CAST

POWER FACTOR: ≥ 0.95


VOLTAGE: AC~165V-265V

LUMENS: 120-130 Lm/W

SURGE PROTECTION: 10KV

CRI: RA $\geq$ 80

IP LEVEL : IP66

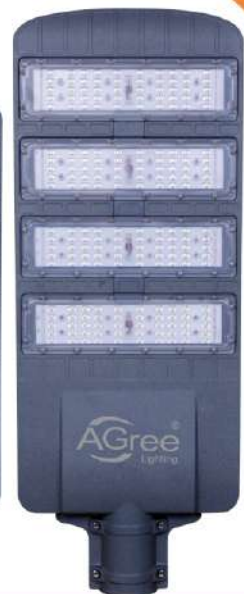



SMD FLOOD LIGHT

MODEL: **PC-LENS**

POWER: **50W, 100W, 150W,
200W, 300W, 400W**

COLOUR: 6500K, 3000K

BODY COLOUR: WHITE

BODY MATERIAL: ALUMINIUM DIE CAST

POWER FACTOR: ≥ 0.95

VOLTAGE: AC~165V-265V

LUMENS: 100-110 Lm/W

SURGE PROTECTION: 6KV / 10KV

CRI: RA $\geq$ 80

IP LEVEL: IP66





SMD FLOOD LIGHT

MODEL: **PC SLIM**

POWER: **50W, 100W**

COLOUR: 6500K, 3000K

BODY COLOUR: GREY

BODY MATERIAL: ALUMINIUM DIE CAST

POWER FACTOR: $PF \geq 0.95$

VOLTAGE: AC~165V-265V

LUMENS: 110-120 Lm/W

SURGE PROTECTION: 4KV

CRI: $RA \geq 80$

IP LEVEL: IP66





100W



150W



SMD HIGH BAY

MODEL: **UFO**

POWER: **100W, 150W, 200W**

COLOUR: 6500K, 3000K

BODY COLOUR: GREY

POWER FACTOR: ≥ 0.95

VOLTAGE: AC~165V-265V

LUMENS: 110-120 Lm/W

SURGE PROTECTION: 4KV

BODY MATERIAL: ALUMINIUM DIE CAST

IP LEVEL: IP66

CRI: RA $\geq$ 80



SMD PANEL LIGHT

MODEL: **2X2'**

POWER: **36W, 48W, 72W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE

DIAMETER: Ø (595mm X 595mm)
Ø (600mm X 600mm)

VOLTAGE: AC~165V-265V


POWER FACTOR: $\geq 0.95 / 0.65$

LUMENS: 100-110 Lm/W

SURGE PROTECTION: 2.5KV

FRAME COLOUR: BLACK & WHITE

CRI: RA $\geq$ 80

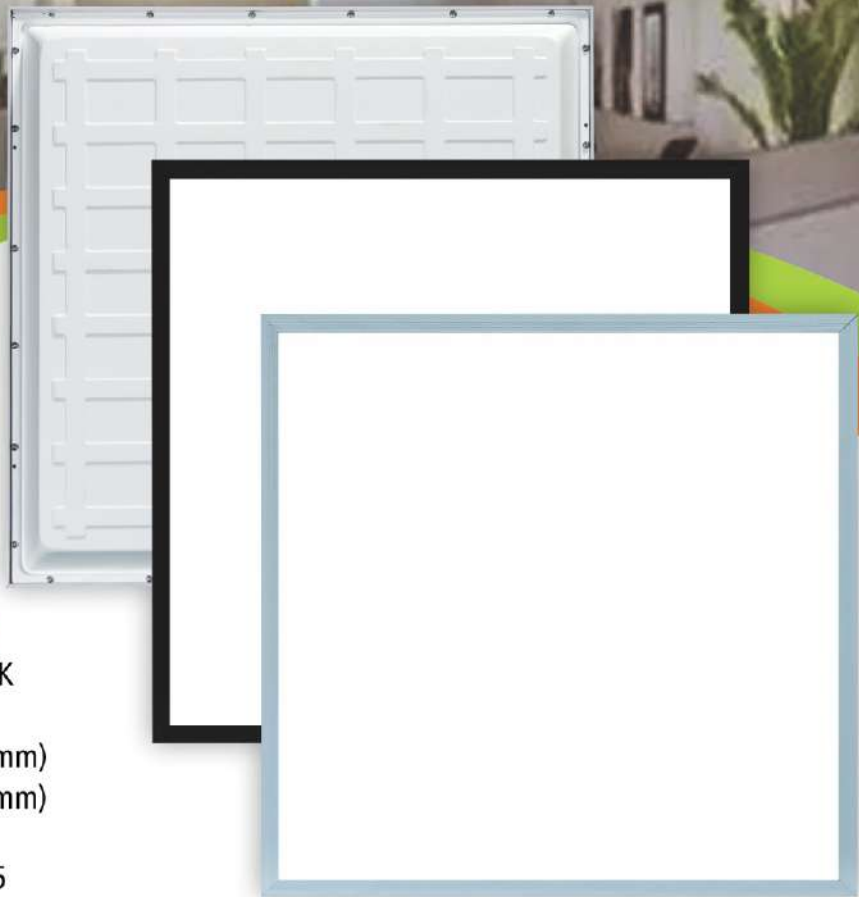



SMD **PANEL LIGHT**

MODEL: **1X4'**

POWER: **36W, 48W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE

DIAMETER: Ø 295mm X 1195mm

VOLTAGE: AC~165V-265V

POWER FACTOR: $\geq 0.95 / 0.65$

LUMENS: 100-110 Lm/W

SURGE PROTECTION: 2.5KV

FRAME COLOUR: BLACK & WHITE

CRI: RA $\geq$ 80



SMD PANEL LIGHT

MODEL: **2'X4'**

POWER: **48W, 72W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE

DIAMETER: Ø 595mm X 1195mm

VOLTAGE: AC~165V-265V

POWER FACTOR: ≥ 0.95

LUMENS: 100-110 Lm/W

SURGE PROTECTION: 2.5KV

FRAME COLOUR: BLACK, WHITE

CRI: RA $\geq$ 80

**NEW
ARRIVAL**



SMD **ICE PANEL**

MODEL: **ICE PANEL ROUND**

POWER: **12W, 18W, 24W, 36W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE

CUT HOLE SIZE: 12W (Minimum 50mm) DIAMETER: Ø (100mm)

18W (Minimum 50mm) DIAMETER: Ø (120mm)


24W (Minimum 50mm) DIAMETER: Ø (170mm)

36W (Minimum 50mm) DIAMETER: Ø (220mm)

VOLTAGE: AC~165V-265V

LUMENS: 120-130 Lm/W

CRI: RA_≥80

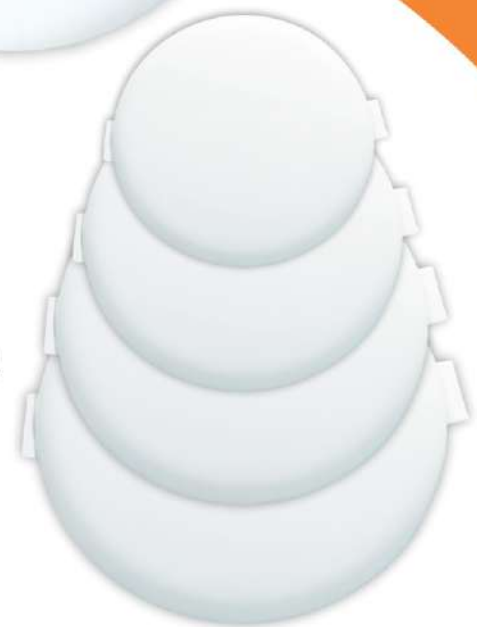



SMD **ICE PANEL**

MODEL: **SURFACE ICE PANEL ROUND**

POWER: **18W, 24W, 36W**

COLOUR: 6500K, 4000K, 3000K

BODY COLOUR: WHITE, BLACK

DIAMETER: Ø 18W (120mm X 120mm)

Ø 24W (175mm X 175mm)

Ø 36W (225mm X 225mm)

VOLTAGE: AC~165V-265V

LUMENS: 120-130 Lm/W

CRI: RA_≥80



1
METER

2
METER

TRACK PATTI

COLOUR:

WHITE, BLACK

SIZE: **1 METER** (PVC & ALUMINIUM SPECIAL)

SIZE: **2 METER** (ALUMINIUM SPECIAL)



JUNCTION TRACK JUNCTION

COLOUR: **WHITE, BLACK**

ANGLE: **180°, 90°**





OPEN **TRACK BASE**

COLOUR: **WHITE, BLACK**

SIZE: **SMALL 3.25"**

LARGE 7.25"

BODY MATERIAL: **PVC**



2025

